

Field Firing Solutions Tactical Ballistic Software & Trimble Field PDA's



Junio T-41 Rugged PDA

- SMS Text and 3.75G Cellular Data Transfer Capabilities
- Voice Capability
- Upload / Download Data From the Cloud Using Wi-Fi or WWAN Connections
- 8 Megapixel Camera can be set to Automatically Include Time and Location Data from GPS Receiver
- 2-4 Meter GPS
- 800 MHz or 1 GHz Processor
- WEHH 6.5 Operating System

Nomad 900 Rugged PDA

- Outdoor Rugged Design Certified to MIL-STD-810F and IP68
- All-Weather Durability
- Windows Mobile 6.1 Operating System
- 806 MHz XScale Processor, 128 MB SDRAM, 512 MB to 2 GB Non-Volatile Flash Storage
- CompactFlash (CF) Type II & Secure Digital (SD/SDHC) card slot
- Easy Connectivity to Bluetooth Devices
- Numeric Keyboard

Field Firing Solutions® - Tactical Ballistic Software (FFS-Tactical)

- Powerful Ballistic Algorithm Engine
- Intuitive Easy To Use Graphical User Interface Optimized For Sniper Team Operations
- English and Metric Units
- Bullet & Cartridge Database
- Inputs: Atmospheric, Bullet, Scope Target, Wind, Rifle
- Trajectory Table
- MIL or MOA Adjustments
- Barometric Pressure: Station or Metro
- Multi-Vector Wind Zones and Cross Wind Deflect
- Wind Direction: Degrees or Clock Face
- Ballistic Software Support Tools
 - Spin Drift
 - Coriolis Acceleration
 - Precision Scope Calibration
 - Deceleration Constant (DK) Calculator
 - Vertical Deflection
 - Shot Log
 - Sensor Fusion: Laser Range Finder, GPS, Weather Meter (under development)

* Delta V Version Available

| Trajectory Table | | Wind Correction Table | |
|------------------|---------|-----------------------|----------|
| Start | End | MPH | Mil Hold |
| 200 yd | 1740 yd | 0 | 4.5 R |
| 1000 yd | 50 yd | 1 | 4.1 R |
| Y | TOF | Emil | Wmil |
| 1200 | 1.93 | 12.8 | 0.3 L |
| 1250 | 2.05 | 13.9 | 0.3 L |
| 1300 | 2.18 | 15 | 0.3 L |
| 1350 | 2.31 | 16.2 | 0.4 L |
| 1400 | 2.45 | 17.4 | 0.4 L |
| 1450 | 2.59 | 18.7 | 0.4 L |
| 1500 | 2.73 | 20.1 | 0.4 L |
| 1550 | 2.88 | 21.6 | 0.5 L |
| 1600 | 3.03 | 23.1 | 0.5 L |
| 1650 | 3.18 | 24.7 | 0.5 L |
| 1700 | 3.34 | 26.4 | 0.6 L |
| 1740 | 3.47 | 27.8 | 0.6 L |

Ashbury Precision Ordnance Mfg.
A Division of Ashbury International Group, Inc.
PO Box 8024, Charlottesville, VA. 22906-8024
Tel 434-296-8600, Fax 434-296-9260
info@AshburyIntlGroup.com

P/N 090-03V-0009-00




**TRUSTED
TO MAKE IT
BETTER.**

www.AshburyIntlGroup.com

Field Firing Solutions Tactical Ballistic Software & Trimble Field PDA's

ACCESSORIES


- AC/DC battery charger
- Interface cables
- Screen protectors
- External AA battery adapter
- Tactical Tripod & Spotting Scope Kits
- Vectronix laser range finders
- Handheld weather meter
- Ballistic software training

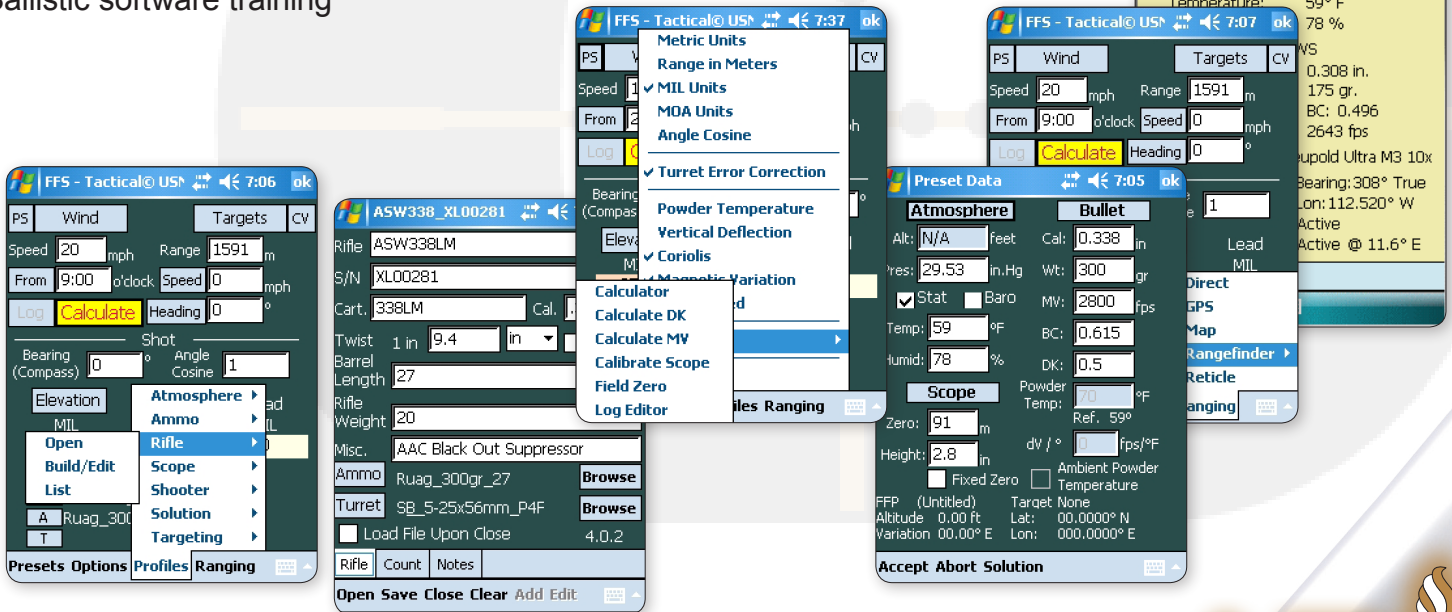

Ashbury Precision Ordnance Mfg.

A Division of Ashbury International Group, Inc.
PO Box 8024, Charlottesville, VA. 22906-8024
Tel 434-296-8600, Fax 434-296-9260
info@AshburyIntlGroup.com

www.AshburyIntlGroup.com



**TRUSTED
TO MAKE IT
BETTER.**