


# ASYMMETRIC WARRIOR®

**APO**  
ASHBURY PRECISION ORDNANCE  
The Precision Long Range Rifle Specialists

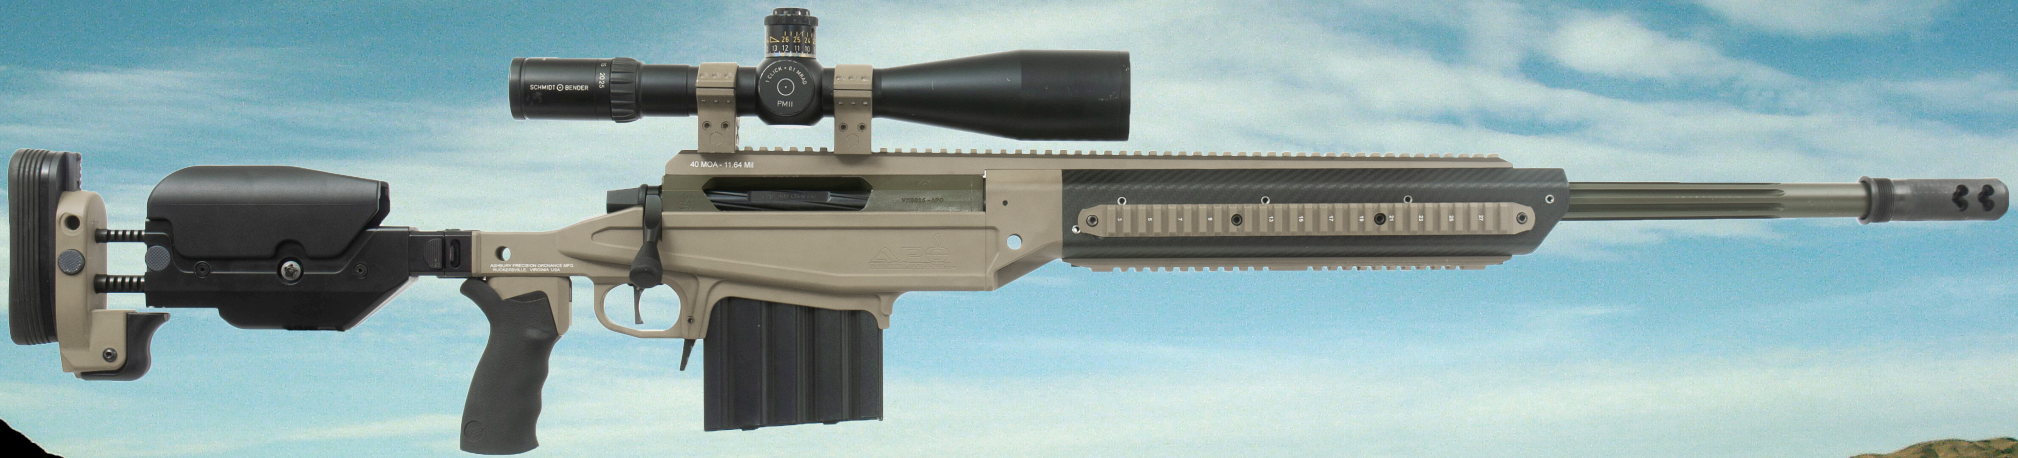

## ASW-375CT

ULTRA LONG RANGE

PRECISION TACTICAL RIFLE SYSTEM

Modular by Definition... Performance Engineered by Design



# ASW-375CT ULR

Asymmetric-Warrior.com

ASYMMETRIC WARRIOR® Precision Tactical Rifle System

The Asymmetric Warrior® ASW-375CT Precision Tactical Rifle is Ashbury Precision Ordnance’s premium, custom crafted, ultra long range, precision rifle. The full featured ASW-375CT is designed to provide users with a rugged, modular and ergonomically adjustable precision rifle designed for years of reliable service under tough field conditions. Chambered for the super magnum .375 Cheytac® cartridge, the ASW-375CT provides exceptional accuracy and is capable of precision target engagements to distances exceeding 2km.

Designed for ultra long range precision shooting and dependability in the field, the ASW-375CT provides users with many noteworthy operational features. **The Action:** APO’s SABER® VX octagonal stainless steel bolt action receiver is precision CNC manufactured to close tolerances with a one-piece bolt crafted of tool steel, finished with a tough black nitride coating. **The Barrel:** Pinnacle Series 416R stainless steel – ASW fluted contour - match grade, threaded muzzle, and highly efficient muzzle brake suppressor adapter. **The Trigger:** Adjustable two-stage trigger with a reliable light first stage & second stage that breaks crisply at 3 lbs.

**The Patented SABER Chassis:** SABER AVX MOD-1 Carbon Fiber Series modular rifle chassis system. SABER rifle chassis are rugged, reconfigurable, low maintenance, and require no bedding to deliver optimal accuracy. SABER rifle chassis are impervious to foul weather conditions, and hot/cold temperature extremes. **The Ergonomic Shoulder Stock:** Tool-less ergonomically adjustable PBA-H (Push Button Adjustable Hybrid) shoulder stock. The PBA-H provides push button length of pull, vertical recoil pad drop and thumbscrew cheek piece height adjustment - all positive locking and completely tool-less! The PBA-H utilizes a butt hook for non-shooting hand support, and an optional rapidly adjustable 3-position field monopod is available.

The ASW-375CT has a user adjustable hand grip to customize the distance-to-trigger for large and small hands and an interchangeable near vertical 11° grip angle. The ASW-375CT is fitted with an ambidextrous paddle lever magazine catch-release & comes with one seven round magazine.

The ASW-375CT’s Quattro Carbon Fiber MOD-1 forend has a unique heat/mirage mitigating design, exclusive “co-bore aligned” accessory rail locations at 3, and 9 o’clock positions and a 6 o’clock rail for bipod attachment. The ASW-375CT also features Ashbury’s patented, continuous one-piece unitized MIL-STD 1913 30 MOA monolithic scope rail. The patented monolithic rail provides a secure rifle scope mount, reduces vibration, and increases structural rigidity for long range accuracy, and in-line attachment of clip-on night vision, thermal imager and ULR optical prism devices.

Ergonomic adjustability, modularity, shoot-ability, and low-felt recoil with ½ MOA precision are all hallmarks of the ASW-375CT Precision Tactical Rifle.



Trusted to Make it Better!

Utility & Design Patents at  
APO-Patents.com

## CALIBER

.375 Cheytac® 9.5 x 77mm  
.408 ChetTac® 10.36 x 77mm (optional)

## ACTION

SABER VX Magnum Octagonal Receiver, 416R Stainless Steel, Black Nitride Finish (optional left hand)

## BOLT

One-Piece Fluted Two-Lug 4140 Tool Steel, Mini-16 Extractor, Caliber Engraved Bolt, Black Nitride Finish

## TRIGGER

Two-Stage Adjustable with Dual Curved/Straight Trigger (set to ±3 lbs.)

## BARREL

- Pinnacle™ Series 416R Stainless Steel, Fluted Match Grade, Cut Rifling Hand Lapped - 1:8 Twist - Target Crown 11°, Muzzle Threaded 7/8-24
- 29" ULR Contour (custom lengths available)

## MUZZLE BRAKE

Elite Iron Windtalker MBS (alternate options available)

## SOUND SUPPRESSOR (optional)

Elite Iron Windtalker

## RIFLE CHASSIS - MODULAR

- SABER AVX-A1 Carbon Fiber MOD-1

## SHOULDER STOCK - ERGONOMIC/ADJUSTABLE

- PBA-H - Push Button Adjustable Hybrid, Tool-less Positive Locking
  - Limbsaver Premium Recoil Pad
  - Butt Hook, Interchangeable
  - Flush Cup Sling Swivel Sockets x2
  - Monopod, 3-Position (optional)

## STOCK INTERFACE

Folding Lockable Stainless Steel Hinge (optional Fixed & Double Locking)

## MAGAZINE - BOX

7rd Magazine 4.40" (x1)

## HAND GRIP

Ergo Grip Slimline (Changeable AR-15/M-16 Style)

## GRIP ANGLE ADAPTERS

11° (optional 17.5° and 27°)

## FOREND

- Quattro Super Magnum Carbon Fiber Series, Co-Bore Aligned Accessory Rail Locations at 3-6-9-12 o'clock
- Flush Cup Sling Swivel Socket (x3)

## MONOLITHIC PICATINNY SCOPE RAIL

40 MOA Slant Co-Linear Mounted Day & Night Optics

## ACCESSORY RAILS

- 12" Picatinny Rail with Flushcup Sockets (x1)
- 12" Picatinny Rail (x2)
- 4" Picatinny Accessory Rail with Flushcup Sockets (optional)

## SURFACE COATINGS

Hard Coat Anodized and Cerakote Coating

## COLOR

- Forend: Natural Black Carbon Fiber
- SABER Chassis: Black MIL -A-8625 Type III Hard Coat Anodized
- Barreled Action: Armor Black

## ACCURACY

½ MOA 5-Shot Group 375gr RBT Target/Match-Grade Ammunition

## PACKAGING

- Heavy Duty Corrugated Shipping Container
- Hard Lockable Transit Case with Custom Foam Interior (optional)
- Nylon padded Field Carry Bag (optional)

## BASE RIFLE WEIGHT & DIMENSIONS (MBS Only - No Suppressor)

- 29" ULR 17 lbs / Overall Length 51" / Folded Length 41.5" (approx)

Specifications are Subject to Change. Custom Configurations Available.  
Cheytac is a Registered Trademark of Cheytac USA LLC

# ASW-375CT BALLISTICS & ACCESSORIES

Asymmetric-Warrior.com

ASYMMETRIC WARRIOR® Precision Tactical Rifle System

## .375CT EXTERNAL BALLISTICS

375gr Match 3050fps .938BC (G1)

Distance		Elevation	Elevation	Velocity
Yards	Meters	MOA	MILS	FPS
0	0	0	0.0	3050
200	183	0.25	0.1	2889
400	366	3.50	1.0	2686
600	549	7.75	2.2	2490
800	732	12.50	3.6	2301
1000	914	17.75	5.2	2120
1200	1097	23.75	6.9	1946
1400	1280	30.50	8.9	1780
1600	1463	38.50	11.2	1621
1800	1645	47.25	13.7	1470
2000	1828	57.25	16.7	1327

Station Pressure: 29.53 in. Hg.  
Humidity: 78%  
Temperature: 59° F / 15° C  
Elevation: 0 ft ASL

Caliber: .375CT / 9.5 x 77mm  
Bullet Type: RBT  
Velocity: 3050± Feet Per Second

Bullet Weight: 375 grain  
Ballistic Coefficient: 0.938 (G1)  
Rifle: ASW-375CT  
Barrel Length: 29"

Standard Metro Atmospheric Conditions

## PRECISION TACTICAL RIFLES ACCESSORIES


- Premium Rifle Scopes
- SABER EO Scope Rings
- Field Monopod - 3 Position
- Bipod
- Shooting Sling
- Sound Suppressor
- Precision Rifle Cleaning Kit
- Protective Field Nylon Padded Bag
- Custom Transit Case Foam Insert
- Ballistic Software & Handheld Computer
- Spare Steel Magazines
- SABER Field Multi-Tool
- Anti-Cant Device, Scope Mounted
- Angle Cosine Indicator (ACI)
- Repair & Spare Parts Kit
- Sniper's Field Tool Kit
- Spotting Scope / TACT 3 Tripod Kit
- RSTA-II Tripod Shooting System

Contact us for Complete Rifle Packages, Match-grade Ammunition, Armorer & Precision Rifle Marksmanship Training

## COATINGS & FINISHES



Kryptek® Camo



Multicam® Camo



OD Green



Flat Dark Earth



Armor Black



Sniper Grey



Black Anodized

Other Colors & Coatings Available



Made in USA



The Precision Long Range Rifle Specialists

Ashbury Precision Ordnance Mfg. ▪ 84 Business Park Circle ▪ Ruckersville ▪ Virginia ▪ 22968 ▪ 434-296-8600  
AshburyPrecisionOrdnance.com ▪ info@AshburyPrecisionOrdnance.com

v20190207



Scan me